



AVA SERIES

- ▶ Direct drive, zero cogging, zero backlash voice coil motors
- ▶ Low coil mass with very fast response and bandwidth
- ▶ No contact between coil and core movement (no wear and tear)
- ▶ Smooth motion at low speeds with limitless resolution (depends on feedback device)

UK & Ireland Official Distributor




11-15 Francis Avenue, Bournemouth,
Dorset UK BH11 8NX
Tel.: (+44) 01202 599922
enquiries@motioncontrolproducts.com
www.motioncontrolproducts.com

AVA1-20

Performance Parameters		Symbol	Unit	AVA1-20
Stroke		S	mm	20
Continuous Force @100°C ^{①②}		F _c	N	3.84
Peak Force ^③		F _{pk}	N	11.5
Force Constant ±10% ^③		K _f	N/A	1.92
Back EMF Constant ±10% ^③		K _e	V/(m/s)	1.92
Motor Constant @25°C ^②		K _m	N/Sqrt(W)	1.62
Resistance @25°C ±10% ^③		R ₂₅	Ω	1.40
Inductance ±20% ^③		L	mH	0.27
Electrical Time Constant		τ _e	ms	0.19
Continuous Current @100°C ^③		I _c	A	2.0
Peak Current		I _{pk}	A	6.0
Continuous Power Dissipation @100°C ^③		P _c	W	7.2
Max. Coil Temperature		t _{max}	°C	100
Thermal Dissipation Constant ^①		K _{th}	W/°C	0.096
Max.Voltage		U _{max}	Vdc	60
Mechanical Parameters				
Coil Mass		m _{coil}	g	17
Core Mass		m _{core}	g	186
Running Clearance		L _{gap}	mm	0.6
Other Information				
Insulation Class		Class A (105°C)		
Protection Grade		IP20		
Compliance with Global Standards		RoHS		
Ambient Temperature	Operation	0°C to 40°C (non-freezing)		
	Storage	-15°C to 70°C (non-freezing)		
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)		
	Storage	10%RH to 90%RH (non-condensing)		
Recommended Ambience		Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.		

Dimension

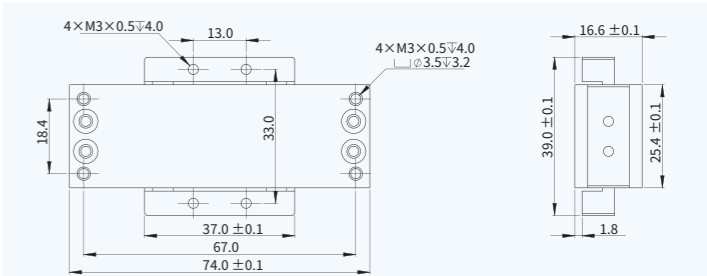


- ① Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment.
 - ② The values are at mid stroke.
 - ③ Resistance is measured by DC current with standard 0.5 m lead wire.
 - ④ Inductance is measured by current frequency of 1 kHz.
- The contents of datasheet are subject to change without prior notice.

AVA2-20

Performance Parameters		Symbol	Unit	AVA2-20
Stroke		S	mm	20
Continuous Force @100°C ^{① ②}		F _c	N	11.69
Peak Force ^③		F _{pk}	N	35.1
Force Constant ±10% ^④		K _f	N/A	8.35
Back EMF Constant ±10% ^⑤		K _e	V/(m/s)	8.35
Motor Constant @25°C ^⑥		K _m	N/Sqrt(W)	4.34
Resistance @25°C ±10% ^⑦		R ₂₅	Ω	3.7
Inductance ±20% ^⑧		L	mH	1.24
Electrical Time Constant		τ _e	ms	0.34
Continuous Current @100°C ^⑨		I _c	A	1.4
Peak Current		I _{pk}	A	4.2
Continuous Power Dissipation @100°C ^⑩		P _c	W	9.3
Max. Coil Temperature		t _{max}	°C	100
Thermal Dissipation Constant ^⑪		K _{th}	W/°C	0.125
Max.Voltage		U _{max}	Vdc	60
Mechanical Parameters				
Coil Mass		m _{coil}	g	45
Core Mass		m _{core}	g	496
Running Clearance		L _{gap}	mm	0.6
Other Information				
Insulation Class		Class A (105°C)		
Protection Grade		IP20		
Compliance with Global Standards		RoHS		
Ambient Temperature	Operation	0°C to 40°C (non-freezing)		
	Storage	-15°C to 70°C (non-freezing)		
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)		
	Storage	10%RH to 90%RH (non-condensing)		
Recommended Ambience		Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.		

Dimension

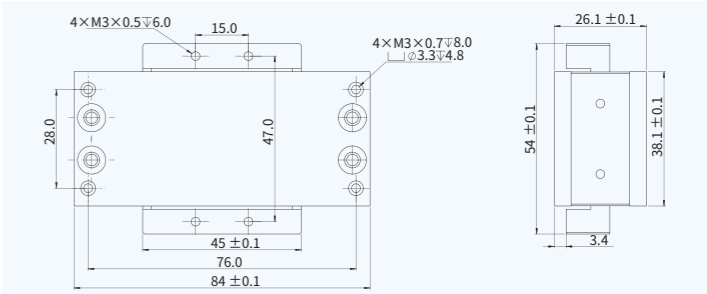


- ① Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment.
 - ② The values are at mid stroke.
 - ③ Resistance is measured by DC current with standard 0.5 m lead wire.
 - ④ Inductance is measured by current frequency of 1 kHz.
- The contents of datasheet are subject to change without prior notice.

AVA3-20

Performance Parameters		Symbol	Unit	AVA3-20
Stroke		S	mm	20
Continuous Force @100°C		F _c	N	26.32
Peak Force		F _{pk}	N	79.0
Force Constant ±10%		K _f	N/A	9.40
Back EMF Constant ±10%		K _e	V/(m/s)	9.40
Motor Constant @25°C		K _m	N/Sqrt(W)	7.43
Resistance @25°C ±10%		R ₂₅	Ω	1.6
Inductance ±20%		L	mH	0.7
Electrical Time Constant		τ _e	ms	0.44
Continuous Current @100°C		I _c	A	2.8
Peak Current		I _{pk}	A	8.4
Continuous Power Dissipation @100°C		P	W	16.2
Max. Coil Temperature		t _{max}	°C	100
Thermal Dissipation Constant		K _{th}	W/°C	0.216
Max.Voltage		U _{max}	Vdc	60
Mechanical Parameters				
Coil Mass		m _{coil}	g	72
Core Mass		m _{core}	g	930
Running Clearance		L _{gap}	mm	0.6
Other Information				
Insulation Class		Class A (105°C)		
Protection Grade		IP20		
Compliance with Global Standards		RoHS		
Ambient Temperature	Operation	0°C to 40°C (non-freezing)		
	Storage	-15°C to 70°C (non-freezing)		
Ambient Humidity	Operation	10%RH to 80%RH (non-condensing)		
	Storage	10%RH to 90%RH (non-condensing)		
Recommended Ambience		Indoor (no direct sunlight); No corrosive gas, inflammable gas, oil mist or dust.		

Dimension

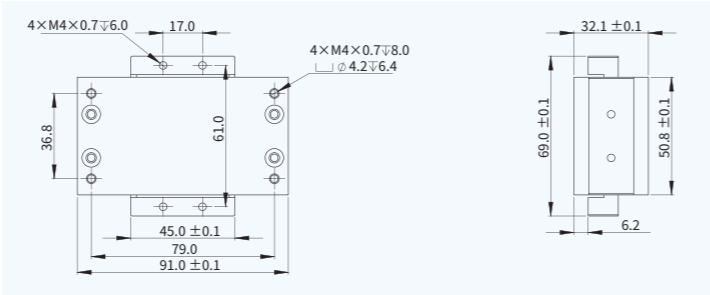

- ① Measurement is taken at ambient temperature 25°C. Value depends on the thermal environment.
 - ② The values are at mid stroke.
 - ③ Resistance is measured by DC current with standard 0.5 m lead wire.
 - ④ Inductance is measured by current frequency of 1 kHz.
- The contents of datasheet are subject to change without prior notice.

Part Numbering

AVA1-20-0.5

Model:
AVA1 / AVA2 / AVA3

Stroke(mm):
20

Cable length (m):
0.5